


Source URL: <http://www.emacinc.com/content/som-9x25m-system-module>

SoM-9X25M System on Module

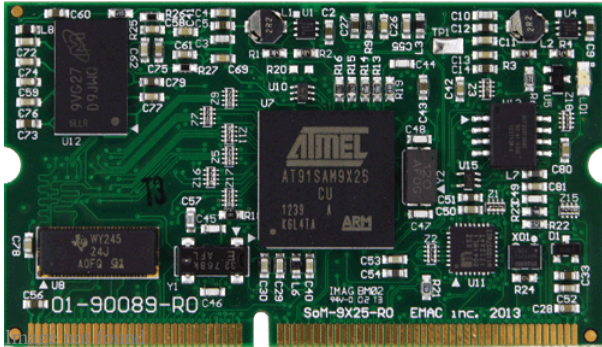

[EMAC OEM](http://www.emacinc.com/sites/default/files/EMAC%20OEM%20LOGO_sm_0.png) http://www.emacinc.com/sites/default/files/EMAC%20OEM%20LOGO_sm_0.png

- Small, 144 pin SODIMM form factor (2.66" x 1.5")
- Atmel AT91SAM9x25 400Mhz Processor
- 1x 10/100BaseT Ethernet with on-board PHY (2nd Ethernet Optional)
- 6x Serial ports, 3 with handshake
- 1x USB 2.0 (High Speed) Host port
- 1x USB 2.0 (Full Speed) Host port
- 1x USB 2.0 (High Speed) OTG
- Up to 128 MB of DDR2 RAM
- Up to 4 GB of eMMC
- Up to 16 MB of Serial Data Flash
- Battery backed Real Time Clock
- SD/MMC SDIO Flash Card Interface
- 2x SPI Ports
- 2x I2C Ports
- 2x CAN 2.0B Ports
- 1x I2S Audio Port
- Timer/Counters and Pulse Width Modulation (PWM) ports
- 4x A/D Channel with 10-bit A/D Converter
- Typical power requirement less than 1 Watt
- JTAG for debug, including real-time trace
- Linux
- FREE Eclipse IDE with GCC & GDB development tools

The SoM-9x25 is a System on Module (SoM) based on the Atmel AT91SAM9x25 processor. Designed and manufactured in the USA, this wide temperature, fanless ARM9 400 MHz SoM has an Ethernet PHY included along with 6 serial ports with auto RS-485. It utilizes up to 4GB of eMMC Flash, up to 16MB of serial data flash, and up to 128MB of DDR2 RAM. A SoM is a small embedded module that contains the core of a microprocessor system.

Using the same small 144 pin SODIMM form-factor utilized by other EMAC SoM modules, the SoM-9x25

is the ideal processor engine for your next design. All of the ARM processor core functionality is included on this tiny board including: Flash, Memory, Serial Ports, Ethernet, I2S Audio, PWMs, Timer/Counters, A/D, digital I/O lines, Clock/Calendar, and more.

The SoM-9x25 is designed to plug into a carrier board that contains all the connectors and any custom I/O required for the application. This approach allows the customer or EMAC to design a [Custom Carrier Board](#), that meets the customer's I/O, dimensional, and connector requirements without having to worry about the processor, memory, and standard I/O functionality. With this System on Module approach, a semi-custom hardware platform can be developed in as little as a month.

In addition to the option of the developing a custom carrier board, one can be purchased off-the-shelf from EMAC. EMAC provides off-the-shelf Carrier boards that feature A/D, D/A, MMC/SD card, keypad, LCD, Audio, and Modem interfaces. The recommended off-the-shelf Carrier Board for the SoM-9x25 is the [SoM-150ES](#) which allows the user to immediately start coding their application using the powerful Linux Operating System and Tools.

The System On Module approach provides the flexibility of a fully customized product at a greatly reduced cost.

Specifications

SOM Type:

Microcontroller SODIMM Modules

Processor

Processor:

Embedded Atmel ARM9 AT91SAM9X25

Clock Speed:

400 MHz

Real Time Clock:

Memory

BIOS/ Bootloader:

Resident Flash Bootloader (Das Uboot)

Primary Flash:

4GB of eMMC

Secondary Flash:

up to 16MB of Serial Data Flash

Memory Misc.:

- **System Reset:** Supervisor with external Reset Button provision.
- (Optional) 16MB of Serial Data Flash

Primary I/O

GPIO:

32x General Purpose I/Os with 16 ma. drive when used as an output

SDIO:

1x SDIO 4-bit Parallel SDHC Interface

SPI:

2x High-Speed SPI ports with Chip Selects.

Audio:

1x I2S Audio port

USB:

1x USB 2.0 High Speed Host
1x USB 2.0 Full Speed
1x USB 2.0 OTG

Serial Ports:

6x Serial Ports (1x with full handshake
2x with CTS/RTS handshake)

I2C:

I2C ports

Watchdog:**Secondary I/O****CAN:**

2x CAN 2.0B Ports

Timers/ Counters/ PWM:

3x 3 channel 32-bit timers/counters with capture
compare

PWM

LPT Port:**Keypad:****PS/2:****Analog on****A/D:****D/A:****Analog Misc.:**

Analog I/O: 4 channel, 10-bit Analog-to-Digital converter (ADC)

Dimensions**Dimensions:**

2.66 × 1.5 in

Form Factor:

144-pin Headless SODIMM

Power Requirements**Idle Current:**

210 mA

Constant Busy Loop Current:

245 mA

Typical Current:

170 mA

Typical Voltage:

3.3 V

Max Boot Current:

255 mA

Power Misc.:

- **Idle system with Ethernet PHY disabled:** 145 mA
- **APM sleep mode with Ethernet PHY disabled:** 20 mA

Environmental

Low Operating Temperature:

-40 C

High Operating Temperature:

85 C

Upper Operating Humidity:

90%

Pricing

SoM-9x25-120

W/ CPU, 4GB eMMC Flash, 128MB DDR2 RAM, 8MB Serial Data Flash

\$130.00

Stock

Base Product:

SoM-9X25M

Non-Stock NCNR:

0

Carrier Boards:

Title: SoM-150ES-000

Standard Carrier Board

\$150.00

Base Product:

SoM-150ES

Title: SoM-150ES-007

Bare-Bones Carrier Board

\$100.00

Base Product:

SoM-150ES

Title: SoM-150ES-031

Deluxe Carrier Board with A/D, D/A, Audio

\$220.00

Base Product:

SoM-150ES

Source URL: <http://www.emacinc.com/content/som-9x25m-system-module>